

Epic Series FlatTV

37FD9954

37" Widescreen Plasma FlatTV HDTV Monitor



- Flat, Slim and Wide design
- Plasma ALiS/HD technology
- Superslim 3.5" depth
- Brightness 1000cd/m²
- 160° viewing angle / Anti-reflective coating
- Integrated speakers/sound system
- 2x13Watt RMS
- HD in - 2fhYPbPr in / RGB+HV
- DVI-digital in / 1fh YUV in
- VGA in/out - SmartPort
- RC out - to iTV system
- Fanless design (no fan noise)
- Optional stand



FLATTV™

PHILIPS

37" Widescreen Plasma FlatTV HDTV Monitor /us



Product highlights

ALiS/HD Plasma technology with 852x1024 pixels.

Dual HD component input and full 1080i resolution display for connection to high definition input.

480i, 576i, 1080i, 480p, 720p resolution support.

Powerful 2x13W RMS amplifier built in. Full digital sound processing.

Continuous Zoom. Cursor movable zoom window.

YPbPr inputs for best DVD reproduction

3 menu languages, English, French and Spanish

Technical specifications

Plasma screen

- Visible screen diameter 37" - 16:9 aspect ratio
- ALiS/HD 852x1024 pixels (x3)
- Contrast ratio : 1000:1 (dark room)
- Brightness : 1000cd/m² (without filter plate)
- Anti-reflex coated glass screen
- Fanless design (no fan noise)
- Wall mount kit : Flat-to-Wall as well as Tilted

Picture processing

- Video standards :
 - PAL 4.43 (B, G, D, H, I, N)
 - PAL 3.58 (M, N)
 - NTSC 3.58 (M)
 - NTSC 4.43
 - SECAM
- Tint Control (3 modes)

Ease of Use

- Menu Languages : English, French and Spanish
- Dynamic graphical user interface. Easy and intuitive operation through feedforward and backtracking display.
- Full menu control of all functions through layered menus.
- Onscreen status display for sources and functions (OSD)
- RS232 for service and control via PC
- Last Status (for picture & sound)

Remote Control



- Second handset RC19335009

Connections

- VGA
 - VGA in (15pin sub-D) + audio L-R
 - FlexVGA (Loopthrough/in) (15pin sub-D) + audio L-R
- Audio / Video
 - AV 1 : - Video CVBS, audio L-R
 - AV 2 : - Video CVBS, audio L-R
 - S-Video (Y/C)
 - AV 3 : - Component video in YPbPr, audio L-R (+CVBS)
 - Component video in YPbPr (2Fh for DVD), audio L-R
 - R/G/B/H/V (cinch) + audio L-R
 - DVI-d in (digital) + audio L-R
 - Video CVBS out, audio L-R out
 - RC-out for ICONN box
 - RS232 control / service

Miscellaneous

- VGA cable included, 2m
- CD-rom with RS232 driver software included
- Ambient temperature : +5/+40°C
- Maximum operating altitude : 2000m / 6562ft
- Mains : AC 95-264V, 50/60Hz
- Power consumption: ±300W (normal operation) ; Stand by : <2W
- Weight : monitor 88.2 lbs
- Dimensions (WxHxD):
 - monitor : 42x23x3.5 in.
 - carton : 58.6x37.5x19.3 in.
- UPC: 0 37849 94139 3

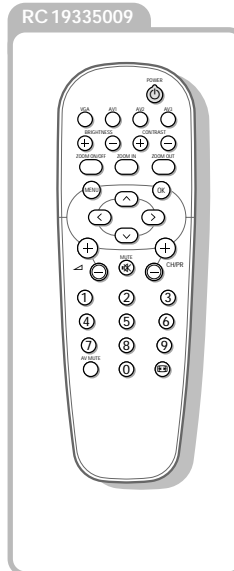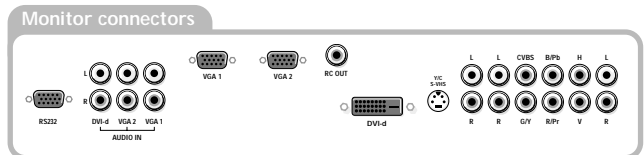

- > Optional FTR9955 e-Box delivers superior picture with Digital Natural Motion™ and the convenience of one cable hookup
- > Optional Matchline FTR9965 e-Box delivers all of the benefits of the FTR9955 PLUS the ultimate in picture performance with Pixel Plus™ and 2 Tuner Split Window PIP
- > Optional TC37FL02 Television Stand (shown on front) provides the ideal solution to table top television placement with an emphasis on high design and safety.

Printed in the U.S.A.

©2003 Philips Consumer Electronics Company
Specifications subject to change without notice.

www.philips.com or AOL keyword: philips

