



4G



EZ 4G™

Five-band Home Cellular Signal Booster

SureCall EZ 4G Five-band Home Cellular Signal Booster

Overview

The EZ 4G incorporates SureCall's cutting edge, award-winning, patented all-carrier technology, in an attractive, beautifully designed and easy to install booster, while delivering the essential need for clear and consistent voice and data reception at an unbelievably affordable price.

Features and Benefits

- First wide-band signal booster that doesn't require the installation of a roof-top antenna and provides exceptional results
- Installation in as little as 15 minutes
- Covers a minimum of 1-2 rooms with poor outdoor reception (increased coverage increases with stronger outdoor signals)
- Five-band solution provides "future-proofing" in case a consumer wants to change carriers or has multiple carrier needs in their home or office
- Supports multiple users simultaneously

Booster Kit Includes:

The standard EZ 4G Kit (SC-PolyEZ-DT-72-Kit) includes: the EZ booster with built-in outdoor antenna, SureCall's 50' RG6 Cable and an indoor desktop antenna.



Key Features:

- Uplink becomes dormant when not in use, providing green, power saving operation
- FCC certified for new regulations and technical standards
- Auto Gain Control (AGC)
- Supports all 2G, 3G and 4G LTE standards
- Patent #8,867,572 and patent pending



EZ 4G™


Five-band Home Cellular Signal Booster

Specifications

Model No.	EZ 4G
Uplink Frequency Range (MHz):	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
Downlink Frequency Range (MHz):	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards:	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Input/Output Impedance:	75 ohm
Maximum Gain:	Cellular- 65dB / PCS-72dB / LTE(A)-63.5dB / LTE(V)-64dB / AWS-71dB
Noise Figure:	7 dB
VSWR:	≤2.0
AC Power Transmitter:	Input AC 110, 50/60 Hz
Maximum Output Power:	1Watt EIRP
Cable:	RG6 Cable (50 feet)
RF Connectors:	F-Female on both ends
Power Consumption:	<10W
Dimensions:	13" Diameter
Weight:	2 lb 11 oz.
FCC ID (USA):	RSNEZBOOST5

Specifications are subject to change. Specifications contained within apply only to products meeting the latest FCC Certification Guidelines.

Installation Example

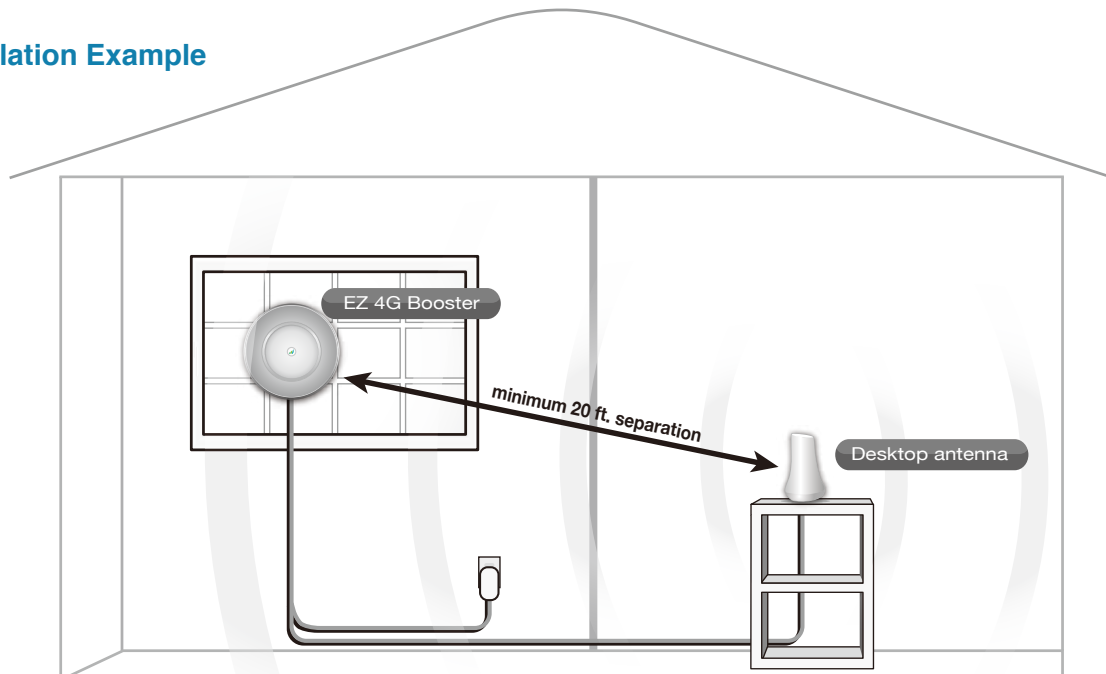

This is a CONSUMER device.

BEFORE USE, you MUST REGISTER THIS DEVICE with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider. You MUST operate this device with approved antennas and cables as specified by the manufacturer. Antennas MUST be installed at least 20 cm (8 inches) from any person. You MUST cease operating this device immediately if requested by the FCC or a licensed wireless service provider. WARNING: E911 location information may not be provided or may be inaccurate for calls served by using this device.

© 2016 SureCall